




Part Number: **SH-200026-2**

Revision 20190403 - Generated 2019-Apr-04

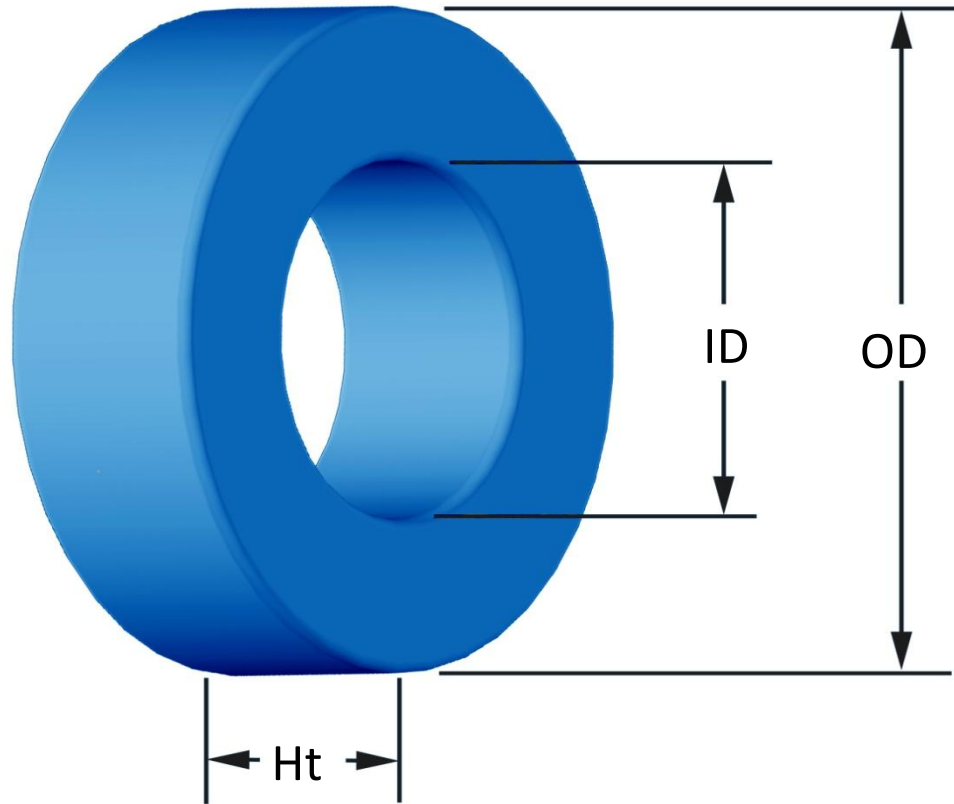

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	50.80 mm 51.69 mm	2.000 in 2.035 in
ID	(nom. - bare core) (min.)	31.75 mm 30.94 mm	1.250 in 1.218 in
HT	(nom. - bare core) (max.)	13.46 mm 14.35 mm	0.530 in 0.565 in
Mass	(approximate)	82 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	1.25 cm ²	
	L _e - Eff. Mag. Path Length	12.733 cm	
	V _e - Eff. Core Volume	15.9 cm ³	
	WA - Min. Eff. Window Area	7.52 cm ²	
	sa - Surface Area	88.2 cm ²	
Inductance	μ _i (reference)	26	
	A _L value (nominal)	32 nH/N ²	
	Test Winding	N=70, #18 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.39 V	
Core Loss	AL tolerance	±8%	
	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=3.287E+08, c=5.779E+06, d=1.240E-14		
	B _{pk}	500 G	
	frequency	100 kHz	
DC Saturation	Core Loss (nominal)	277 mW/cm ³	
	Core Loss (maximum)	318 mW/cm ³	
	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=1.042E-06, c=1.701, d=0.000		
Coating/Pkg	H _{DC}	200 Oe	
	Percent Initial Perm(nom.)	53.9%	
	Percent Initial Perm(min.)	46.1%	
	Coating Type:	Blue Epoxy	
Winding Table	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	125 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	23	30	38	48	60	75	94	118	148	184	230
		Rdc(Ω)	3.1 m	6.4 m	12.8 m	25.8 m	51.2 m	101.9 m	203.0 m	405.4 m	808.6 m	1.6	3.2
Full Winding	Turns	39	61	94	146	226	350	541	837	1,296	2,006	3,104	
	Rdc(Ω)	5.2 m	12.9 m	31.7 m	78.4 m	193.0 m	475.3 m	1.2	2.9	7.1	17.4	42.9	

